





Verpackungen **Verkupferter Draht**  
*Conditionnements **copper-coated wires***


---

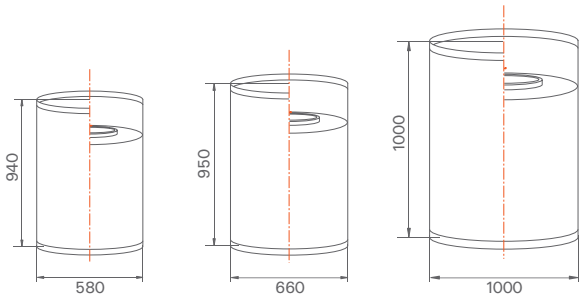


| Fass / Fût |                         |                 |                           |
|------------|-------------------------|-----------------|---------------------------|
| Cod.       | Durchmesser<br>Diamètre | Höhe<br>Hauteur | Nettogewicht<br>Poids net |
| TS         | 580 mm                  | 940 mm          | 380 Kg                    |
| TI         | 660 mm                  | 950 mm          | 550 Kg                    |
| TR         | 760 mm                  | 1200 mm         | 1000 Kg                   |

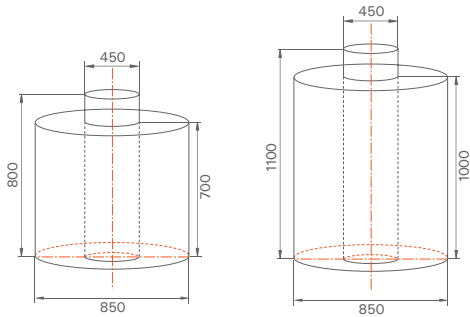

| Coil / Rouleau |                         |                 |                           |
|----------------|-------------------------|-----------------|---------------------------|
| Cod.           | Durchmesser<br>Diamètre | Höhe<br>Hauteur | Nettogewicht<br>Poids net |
| HN             | 850 mm                  | 1.000 mm        | 1.000 Kg                  |
| HP             | 850 mm                  | 700 mm          | 700 mm                    |

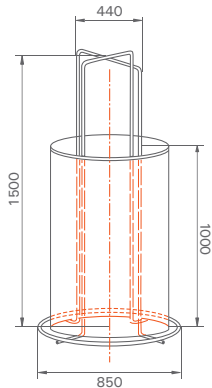

| Kronenstock / Stem frame |                         |                 |                           |
|--------------------------|-------------------------|-----------------|---------------------------|
| Cod.                     | Durchmesser<br>Diamètre | Höhe<br>Hauteur | Nettogewicht<br>Poids net |
| GF                       | 750 ÷ 850 mm            | 1.500 mm        | 1.000 Kg                  |

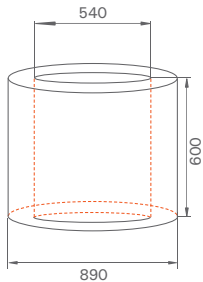

| Coil / Rouleau |                                        |                                          |                 |                            |
|----------------|----------------------------------------|------------------------------------------|-----------------|----------------------------|
| Cod.           | Innerdurchmesser<br>Diamètre intérieur | Aussen durchmesser<br>Diamètre extérieur | Höhe<br>Hauteur | Nettogewicht<br>Net weight |
| FN             | 540 mm                                 | 890 mm                                   | 600 mm          | 1.000 Kg                   |